

CP-S370
CP-X380

Image perfect
fully featured



www.hitachiprojectors.com

- Up to 2200 ANSI lumens
- SVGA and XGA models
- Component video
- Digital keystone correction

HITACHI
Inspire the Next

CP-S370 and CP-X380

These compact projectors offer a remarkable 2200 ANSI lumens at SVGA resolution and 2000 at XGA. Dual computer inputs, plus composite, S-video and component video inputs give maximum versatility, while optical zoom and stereo sound all contribute to a highly professional performance.

OPTICAL

Optical structure	3 LCD panels, one projection lens, RGB shutter method
LCD panel	0.9", P-Si TFT panel x 3, stripe pixel configuration 800 dots x 600 lines x 3 panels (CP-S370) 1024 dots x 768 lines x 3 panels (CP-X380)
Computer resolution	SVGA: 800 x 600 (CP-S370) XGA: 1024 x 768 (CP-X380)
Video resolution	540 TV lines (CP-S370) 600 TV lines (CP-X380)
Lens	F1.74~2.08 (f=36.8~47.8mm) Manual zoom (1.3x) and focus
Lamp	200W UHB
Lamp life	2000 hours
Brightness	CP-S370: 2200 ANSI lumens, 1800 whisper mode CP-X380: 2000 ANSI lumens, 1600 in whisper mode
Contrast ratio	350:1
Focus distance	1.2m~15.9m
Display size	30~300"
Keystone correction	Fixed 20:1 upward shift, plus digital correction
Colour	8 bits/colour, 16.7M colours

COMPATIBILITY

Composite video	NTSC, NTSC 43, PAL(-BGDHI), SECAM, PAL-M, -N/PAL60
Component video	720p and 1080i
Computer	PC, Mac, Workstation, VGA, SVGA, XGA (smart resizing on CP-S370). CP-X380 only: SXGA & UXGA, smart resizing
Plug & Play	DDC1 / 2B
Frequency range	Vertical: 50~120Hz Horizontal: 15~80kHz

FEATURES

Speakers	1.0W x 2
Image control	Digital magnification; digital keystone correction; freeze frame; mirror reverse & invert image
User controls	Remote control with laser pointer, auto configuration, 9 language on screen menu system
Other	Ceiling mountable

CONNECTORS

Computer Input	2 x RGB analogue - 15-pin D-sub 2 x Audio - stereo mini-jack
Video Input	1 x S-Video - mini-DIN 4 pin 1 x Composite - phono 1 x Component - phono 1 x Audio (L&R) - phono
RGB Output	1 x Analogue - 15-pin D-sub
Audio Output	1 x Audio - stereo mini-jack
Control	1 x RS-232C - 15-pin D-sub 1 x USB

POWER

Power supply	100~120 / 220~240V AC, 50/60Hz
Power consumption	310W

PHYSICAL SPECIFICATIONS

Dimensions (WxDxH)	298 x 228 x 95mm
Weight	3.25kg
Noise level	≤40dB normal, ≤36dB whisper mode

SUPPLIED WITH

Remote control (with laser pointer on CP-X380 only)	
Soft carrying case	Power cord (US, UK, Europe)
RGB cable	PS/2 mouse cable
Component video cable	AA batteries x 2

OPTIONS

Aluminium flight case (FLC200)
Wheeled aluminium flight case (FLC300A), accommodates projector and notebook computer

- ◆ High quality optical zoom lens
- ◆ Digital magnification
- ◆ Digital keystone correction
- ◆ Freeze frame
- ◆ All digital functions available from remote control unit

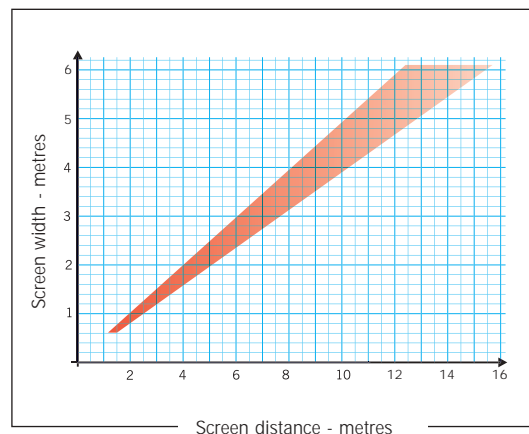
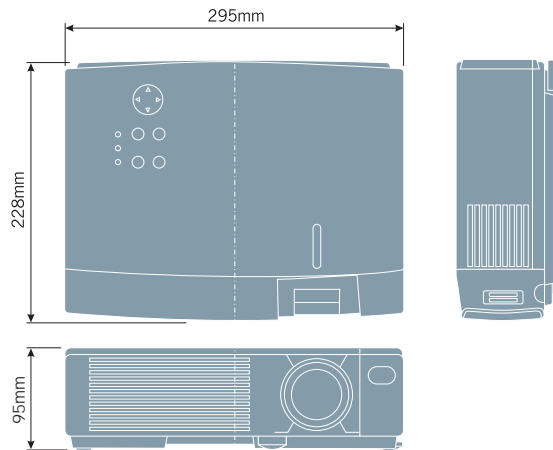


Image size		Projection distance	
Diagonal	Width	Min	Max
30" (0.76)	0.61m	1.2m	1.5m
40" (1.02)	0.81m	1.6m	2.1m
60" (1.52)	1.22m	2.4m	3.1m
80" (2.03)	1.63m	3.2m	4.2m
100" (2.54)	2.03m	4.1m	5.2m
120" (3.05)	2.44m	4.9m	6.3m
150" (3.81)	3.05m	6.1m	7.8m
200" (5.08)	4.06m	8.2m	10.4m
300" (7.62)	6.10m	12.4m	15.7m

All brand or product names are trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without notice.

Warranty: 3 years for projector, 6 months for lamp only - subject to normal use.

Hitachi Information Media Group

European head office:
Dukes Meadow, Millboard Rd
Bourne End, SL8 5XF, UK
Tel: +44 (0)1628 643000
Fax: +44 (0)1628 643403
www.hitachiprojectors.com

Danish office:
Herstedøstervej 27-29
DK-2620 Albertslund
Tel: +45 43 43 60 50
Fax: +45 43 43 60 51
www.hitachiprojectors.com

Finnish office:
Askonkatu 9 C
15100 Lahii
Tel: +358 (0)3 8858 271
Fax: +358 (0)3 8858 272
www.hitachiprojectors.com

Norwegian office:
Brugata 14
N-0186 Oslo
Tel: +47 2205 9085
Fax: +47 2205 9061
www.hitachiprojectors.com

Swedish office:
Box 77
S-164 94 Kista
Tel: +46 8 5627 1100
Fax: +46 8 5627 1111
www.hitachiprojectors.com

HITACHI
Inspire the Next