

## LBB 3546/00

### Delegate Unit with Channel Selector, Chip-Card Reader and Graphic LCD Screen

- Graphic LCD screen with backlighting
- Chip-card reader
- Channel selector for accessing interpretations
- Displays messages and conference-related data
- Incorporates all functions of LBB 3545/00 Delegate Unit with Channel Selector

This top-of-the-range, multi-functional delegate unit meets the demands of even the largest conferences. It provides facilities for speaking, registering a request to speak, registering a request to respond, listening, voting, selecting language channels, chip-card reading and displaying conference and user-related information. It is stylistically and functionally similar to the LBB 3545/00 Delegate Unit with Channel Selector, but also includes a chip-card reader and a graphic display with backlighting. When a chip-card is inserted into the card reader, the graphic LCD screen automatically displays user-related information in the language assigned to the delegate chip-card. The graphic LCD screen has permanent backlighting, and can display characters from complex European languages or icon-based scripts such as Chinese. Channel selection is automatically limited to the number of language channels available. The flat-panel loudspeaker offers superior acoustics with minimal feedback, so increasing intelligibility. When the unit is not being used, the loudspeaker panel conveniently folds down.


*Note: The loudspeaker is not muted when the headphones/headset are connected.*

*Note: The pluggable microphone is automatically switched off when an external microphone is connected.*

*Note: For information about the pluggable microphones available for use with this unit, please refer to page 2.3.*

#### Controls and indicators

- Channel selector with channel number display with backlighting and channel select keys (up/down)
- Headphone socket and volume control on each side of the unit
- Socket for external microphone or headset microphone
- Graphic LCD screen. Typical displays include:
  - softkey description
  - multi-lingual user instructions
  - information on the number of current speakers
  - request-to-speak information and confirmation
  - voting results
  - remaining/elapsed speech time
  - public and personal messages
  - additional user information
- Five softkeys with LED indicators (for use in combination with the graphic LCD screen). The softkeys can provide users with display information such as messages, conference- and microphone user-related information. Depending on the application software the five softkeys can be used as voting buttons with confirmation indicators (yellow LEDs), enabling the user to register:
  - PRESENT, NO (-), ABSTAIN (0), YES (+) (parliamentary voting)
  - Numerals: 1 to 5 (multiple choice or opinion poll voting)
  - Rating scale: - -, - 0, +, ++ (audience response)
- Identification and access control by card reader with or without PIN
- Socket for pluggable condenser microphone (ordered separately) with built-in pop- and windshield, complete with a light ring which illuminates when the microphone is on.
- Built-in fold-away flat-panel loudspeaker
- Microphone on/off or request-to-speak button
- Two 'Microphone on' indicators. One is located above the microphone on/off button (dual colour LED for 'request-to-speak' and 'microphone on' indication). The other is located on top of the loudspeaker.
- 'Request-to-speak' confirmation indicator (green LED)
- 'De-init' switch on the underside of the unit

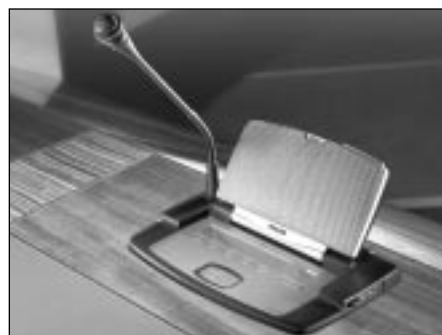

## Connections

- 2 m (78.74 in) cable terminated in a moulded 6-pole circular connector
- 6-pole circular connector for loop-through connections
- 6-pole modular jack connector for Intercom LBB 3555/00
- Left and right headphones sockets (3.5 mm (0.14 in) stereo jack type)
- Connection for external microphone or headset microphone (3.5 mm (0.14 in) stereo jack type)

## Technical data

Mounting	table-top (portable or fixed mounting) and flush-mounting	
Dimensions (H x W x D)	Table-top	50 x 275 x 155 mm (2.0 x 10.8 x 6.1 in)
	Flush-mounted	30 x 275 x 155 mm (1.2 x 10.8 x 6.1 in)
Weight	approx. 1.5 kg (3.3 lb)	
Colour	charcoal base (PH 10736) with silver panel	