


LBB 3510/00

Network Card for Personal Computer

- Allows PC to communicate with DCN for application software control functions
- Headphone socket
- Intercom handset socket
- Optically-isolated inputs and outputs

This network card enables an IBM-compatible PC to communicate with the DCN system. It is installed in the ISA-bus expansion slot at the back of the PC. The DCN software modules can then be run on the PC. The card also includes a headphone socket for audio monitoring and an intercom handset socket for audio communication. When connected to the DCN system its input and outputs are optically isolated.

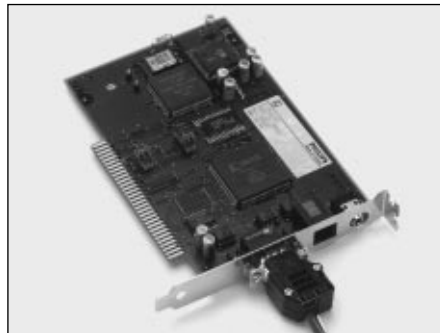

Interconnection

- 8-bit ISA-bus connector
- 3.5 mm (0.14 in) stereo jack socket for operator headphones
- Socket for Intercom Handset LBB 3555/00
- Jumper to select one of five addresses
- 2 m (78.74 in) trunk-line input cable, terminated with a 6-pole moulded circular connector (male) and a 9-pole D-sub plug (female) matching the 9-pole PCB socket on the card

Technical data

Dimensions (H x W) 100 x 147 mm (3.93 x 5.78 in) (0.5 AT slot length)